

PAN AMERICA ENVIRONMENTAL, INC.

Dissolved Air Flotation Treatment Systems
Model: PD

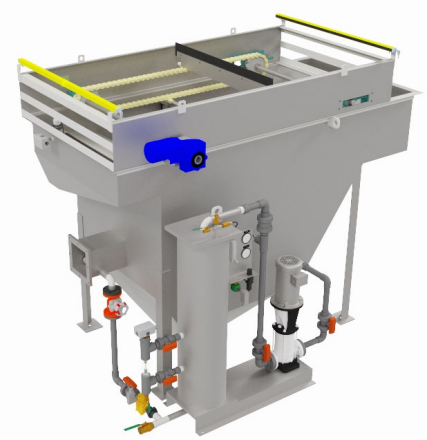

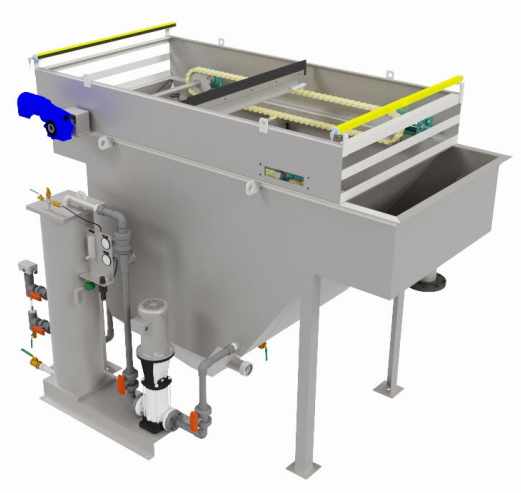


Model	Free Area Ft2	Effective Area Ft2	Flow Rate	Dims L X W X H
PD-16	5	23	16	8’-2” x 3’-3 x 6’-10”
PD-27	13	47	27	8’-2” x 4’-3’ x 6’-10”
PD-50	18	83	50	8’-2” x 5’-3” x 6’-10”
PD-75	24	114	75	9’-7” x 5’-3” x 6’-10”
PD-100	32	165	100	10’-4” x 5’-3” x 6’-10”
PD-155	45	200	155	13’-4” x 5’-3” x 6’-10”

MOC: 304 SS standard
Standard configuration: Tank, skimmer, plate pack, RSS recycle system, float hopper, sludge hopper, controls. Recycle flow + influent flow = total flow in DAF
Dimensions, design and capacities are not for construction and are subject to change without notice.

Total System Skid
The PD DAF can be provided as a complete system in a compact, skid mounted customizable design with our ChemTreat systems, chemical make down, pump systems, Intell-i-Touch control platform and much more, such as:

- Sense and log
- Float pump
- Advanced instrumentation
- Advanced analytics
- Dewatering system
- Sensor LifeTracker
- Safety shutdowns
- STAX flocculation tube system
- Vapor covers
- Explosion proof system designs
- Containerization
- Field skidding
- Pilot testing skid design
- Rental skidded system
- Intell-i-Watch monitoring system

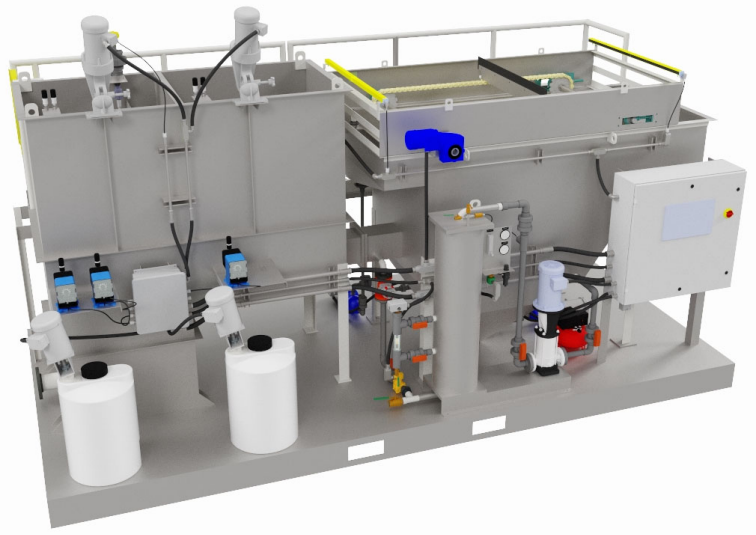

PD Series Dissolved Air Flotation

Pan America Environmental, Inc.
6007 S. Railroad Street Burlington, WI 53105 USA
262.716.0105 panam@panamenv.com www.panamenv.com
©1991-2025 Pan America Environmental, Inc.